


RV260

Controllable anti-pollution check valve EA type, add-on for pressure reducing valves and filters

Product specification sheet

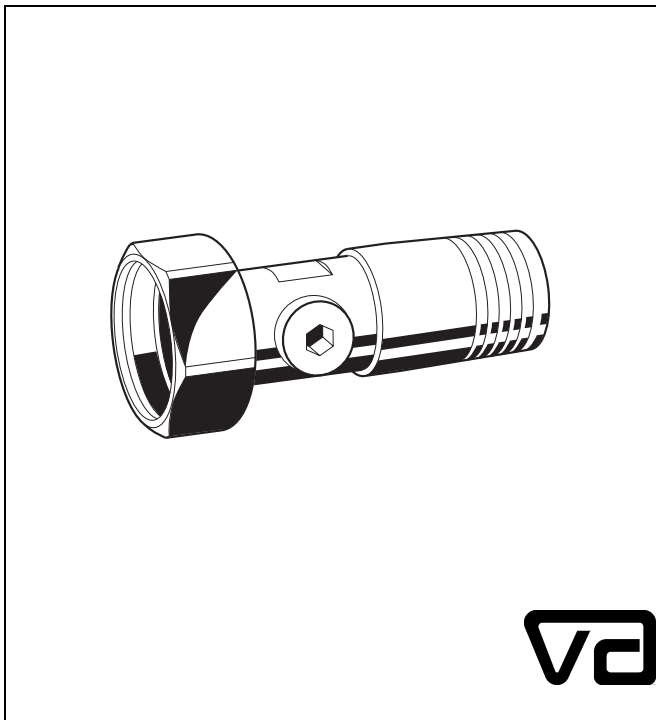

Construction

The check valve comprises:

- Check valve insert
- Union nut with internal thread
- Male threaded union with flat wrench faces
- Test plug with seal ring

Materials

- Brass union and nut
- NBR seal ring
- High grade synthetic material check valve cartridge
- NBR lip seal ring
- High quality synthetic material test plug

Application

Check valves of this type are particularly suitable for integral use with pipeline appliances such as water meters.

Check valves are safety devices for independent prevention of water backflow, for example from drinking water appliances back into the central water supply system.

They can also be used for industrial, commercial and similar systems where back pressure, back flow and back syphonage must be prevented.

The classifications of appliances to meet these requirements are specified in EN 1717.

Special Features


- VA-approved
- Universal application
- Easy installation
- Quiet operation
- Create no shock pressure loadings
- Meets KTW recommendations for potable water
- Suitable for installation in any position
- Low pressure loss

Range of Application

Medium Water
Max. inlet pressure 16.0 bar

Technical Data

Operating temperature 5...40 °C
Operating pressure approx. 0.01 bar
Connection size Male threaded union 3/4"
Female threaded union 1"

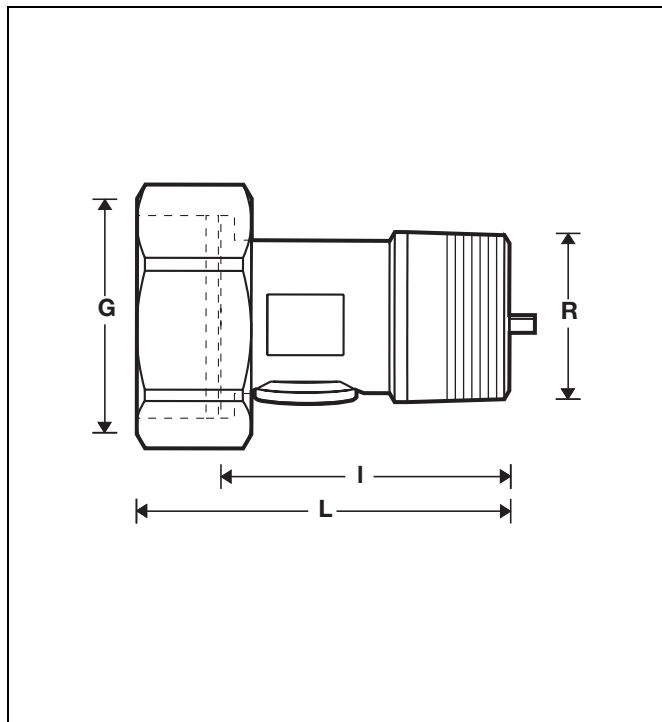

Method of Operation

Spring loaded check valves have a moving seal disc which is lifted off the seat by a greater or lesser amount depending on the flow rate through the valve. If the flow falls towards zero, then the spring pushes the disc back onto the seat and seals the waterway.

To ensure continuing correct function it is recommended that check valves be regularly checked and maintained (as specified in EN 1717).


Options

RV260-3/4AL = long version

RV260-.3/4AS = short version

Option		AL	AS
Connection size	R	3/4"	3/4"
Nominal size diameter	G	1"	1"
Weight	approx. kg	0.26	0.22
Dimensions	mm		
	L	86,5	58,5
	I	78	50
Test and drain plug	R	1/4"	1/4"
k _{vs} -value	m ³ /h	10	10
Nominal flow rate in m ³ /h at Δp = 0.15 bar		2.9	2.9
Danish Approval No.		1.55/17936	

Installation Example

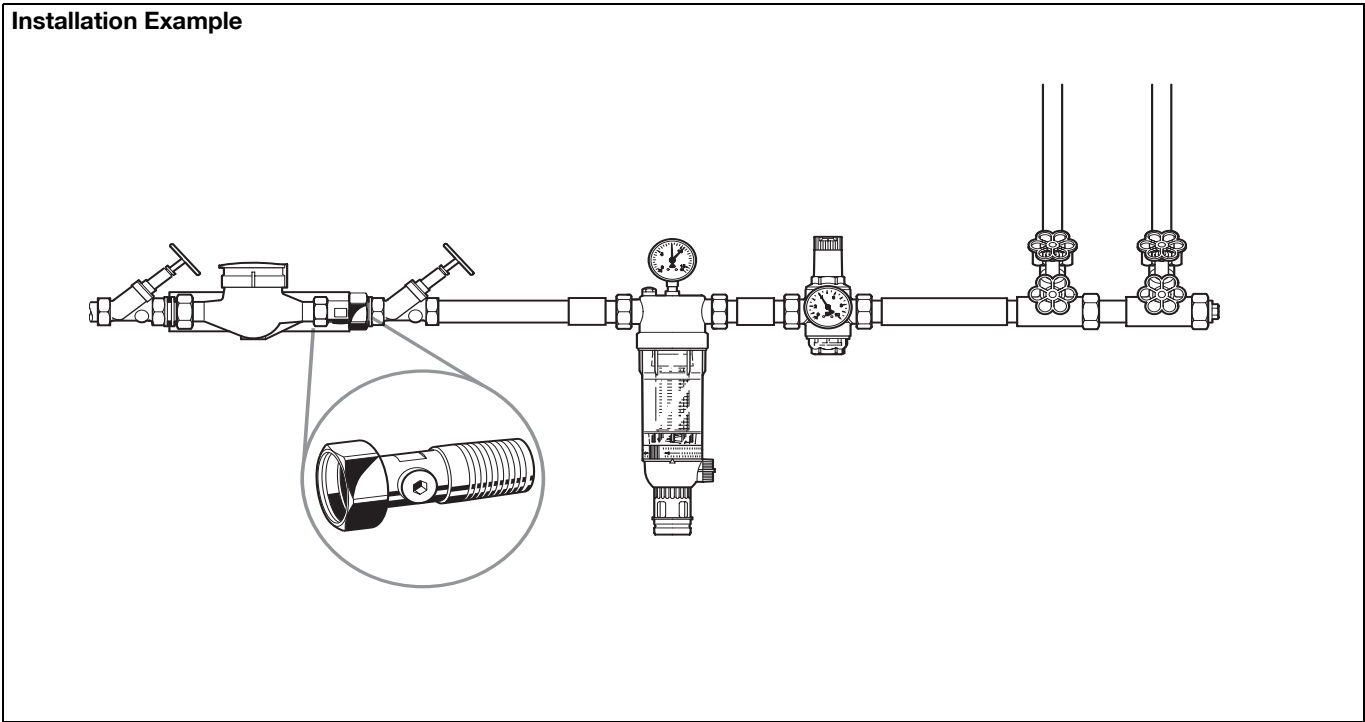

Installation Guidelines

- Install in horizontal pipework with test and drain plug downwards
 - o This position is best for draining
- Install shutoff valves
 - o Shutoff valves provide optimal serviceability
- Ensure good access
 - o Simplifies maintenance and inspection

Typical Applications


Check valves of this type are suitable for use as a safety device on water installations as specified in EN 1717.

They can also be used within the scope of their specification.


The following are some typical applications:

- In central water supply systems
- After a water meter
- As a safety device up to liquid category 2 of EN 1717

Flow Diagram

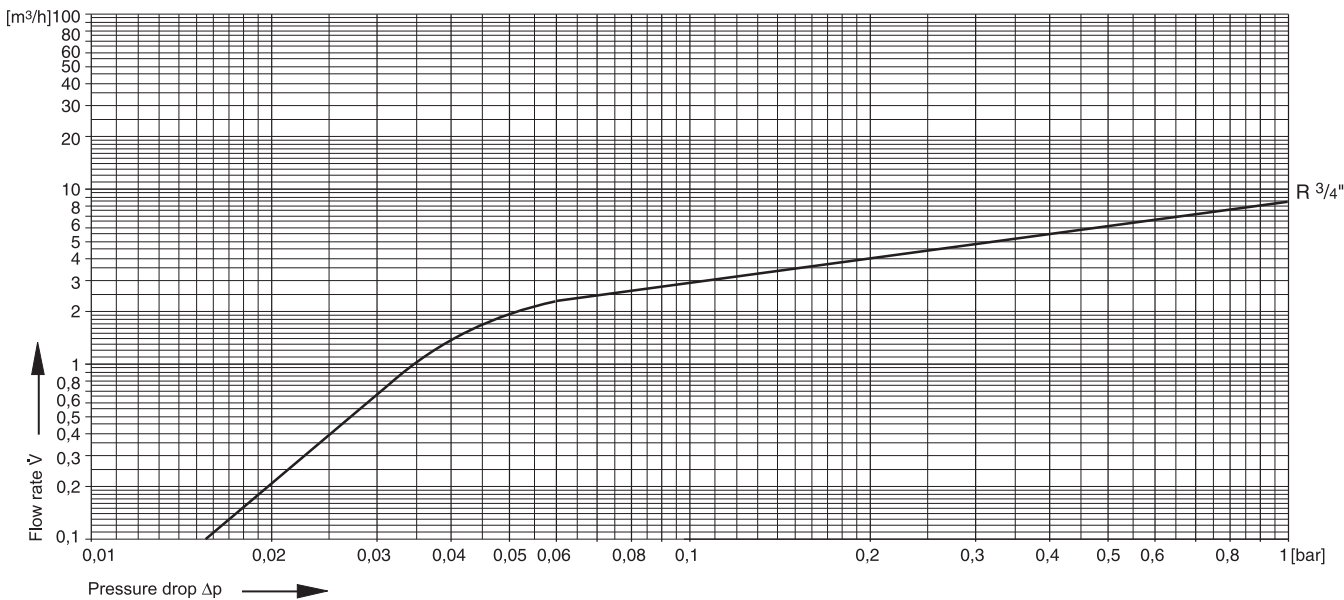

EN0H-1238GE23 R0511 • Subject to change

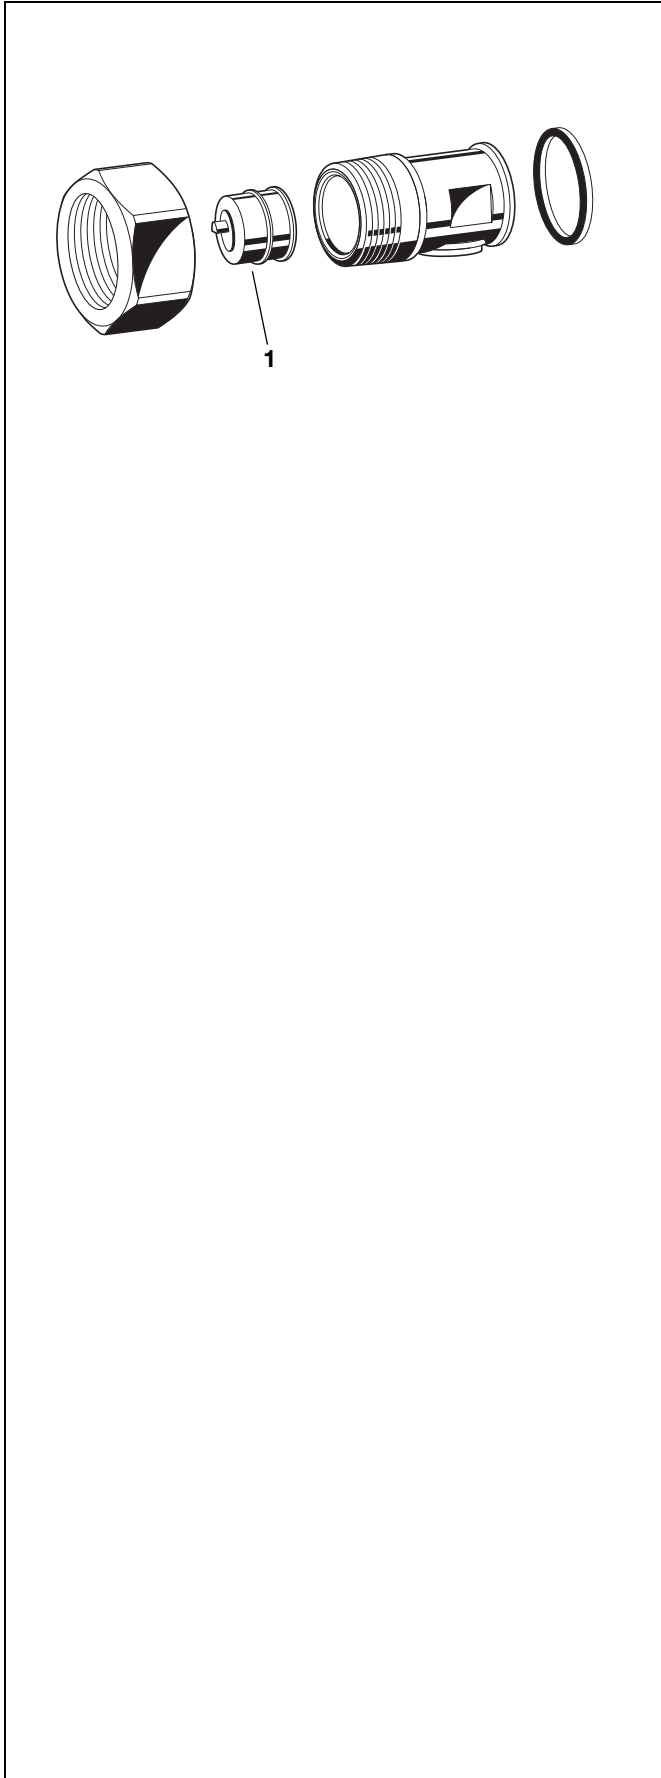

Spare Parts

Check valve RV260 (2011 onwards)

No.	Description	Dimension	Part No.
1	Check valve cartridge	3/4"	2110200

Automation and Control Solutions

Honeywell GmbH
Hardhofweg
D-74821 Mosbach
Phone: (49) 6261 810
Fax: (49) 6261 81309
<http://europe.hbc.honeywell.com>
www.honeywell.com

Manufactured for and on behalf of the
Environmental and Combustion Controls Division
of Honeywell Technologies Sàrl, Z.A. La Pièce 16,
1180 Rolle, Switzerland by its Authorised Repre-
sentative Honeywell GmbH

EN0H-1238GE23 R0511
Subject to change without notice
© 2011 Honeywell GmbH

Honeywell